



Glaucoma Detection Based on Wavelet Transform using Fundus Images

Mr.E.Vinothkumar, S.S.Ravi, M.Madhankumar, S.Vignesh

Muthayammal Engineering College, Rasipuram, Tamil Nadu, India

Department of Electronics and Communication Engineering, Muthayammal College of Engineering, Rasipuram,
Tamil Nadu, India

Publication History: Received: 25.02.2026; Revised: 20.03.2026; Accepted: 25.03.2026; Published: 28.03.2026.

ABSTRACT: Glaucoma is detected in the early stage of the diseases by identifying the intensity variation in the Retinal Nerve Fiber Layer(RNFL).The variation in the intensity was evaluated by calculating the wavelet filters (namely db3,sym3,rbio3.3,rbio3.5 and rbio3.7) coefficient and is obtained by using 2-D Discrete Wavelet Transform(DWT). DWT is good reproducibility in normal fundus images and most popular transformation technique. The proposed system is used to extract different features (namely Average Dh1,Average Dv1 and Energy) for the identification of glaucoma by using the red-free fundus images.

KEYWORDS: Biomedical optical imaging, feature extraction, glaucoma, Retinal Nerve Fiber Layer (RNFL), Image texture, Wavelet Transforms (WT).

I. INTRODUCTION

Glaucoma is a group of eye disease that gradually steal eye sight without warning. In the early stages of the disease, there may be no symptoms and its estimated that half of the people affected by glaucoma may not know that they have it. Vision loss is caused by damage to the optic nerve and its acts like an electrical cable with over a million wires. It is responsible for carrying images from the eye to the brain.It is disease of the optic nerve involving loss of retinal ganglion cells then, Initially high pressure within the eye also known as Intraocular Eye Pressure (IOP). IOP is the main cause of this optic nerve damage. Although IOP is clearly a risk factor we now know that other factors must also be involved because even people with “normal” levels of pressure can experience vision loss from glaucoma.

To detect the glaucoma to extract energy signatures obtained using 2-D discrete wavelet transform , and subject these signatures to different features ranking and feature selection methods[1].To detect the glaucoma by using feature and Higher Order Spectra(HOS) features from digital fundus images and choosing better features and classifiers[2].In this paper, the dependence between features extracted from wavelet decomposition is investigated and incorporated into subband selection for classification[3]. Spectral domain – Optical coherence tomography(OCT) offers improved performance interms of reproducibility[4]. OCT provides structural information and is fast, requires no preparation of the patient, and the output is immediately available[5]. A larger dataset is required for validating the results in this preliminary study and is being collected[6]. Chi2 is a useful and reliable tool for discretization and feature selection of numeric attributes[7]. The concept of Discrete Wavelet Transform(DWT) is presented for applying to textured images for decomposing them into detail and approximation regions[8]. Detection of ocular glaucoma based on the characterization of global flash multifocal electro-retinography(mfERG) images and it can be useful in the detection of advanced stage glaucoma[9]. Further study is necessary to determine whether the unique strengths of the Proper Orthogonal Decomposition(POD) frame work can significantly improve the diagnostic accuracy of the method[10].

II. DATASET

The retinal images used for this study were collected from the Lotus Eye Care Hospital, Tamilnadu, India (<http://www.eyelotusrsp.com>). All the images were taken with a resolution of 2196 × 1958 The images were acquired using a Canon CR5 non-mydratic 3CCD camera with a 45 degree field of view (FOV). The database contains 100 fundus images: 50 normal and 50 open angle glaucomatous images from 20 to 70 year-old

subjects. The fundus camera, a microscope, and a light source were used to acquire the retinal images to diagnose. Fig 1(a),1(b) and 1(c) presents typical normal, glaucoma and RNFL fundus images respectively.

All images in ZEISS database are digitized using a Cannon CR5 non-mydratric 3CCD camera with a 45 degree field of view. Each image is captured using 24-bits per pixel.

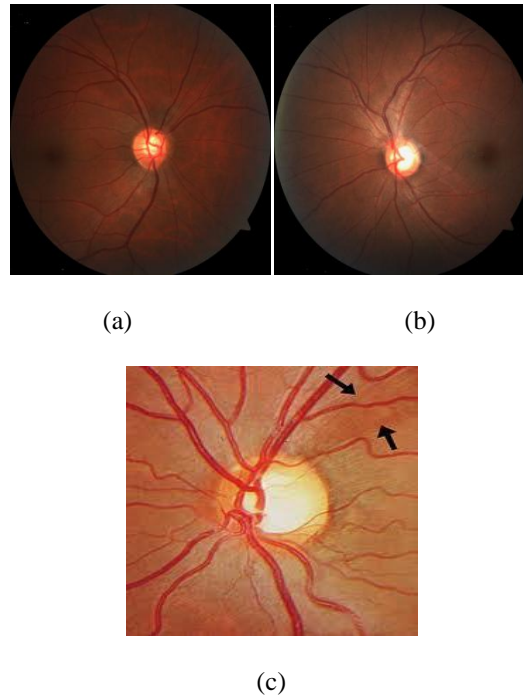


Fig.1. Typical fundus images (a) normal (b) glaucoma (c) rNFL image. In glaucoma, the pressure within the eye's vitreous chamber rises and compromises the blood vessels of the optic nerve head, leading to eventual permanent loss of axons of the vital ganglion cells.

III. METHODOLOGY

The images in the dataset were subjected to standard histogram equalization . The objective of applying histogram equalization was twofold: to assign the intensity values of pixels in the input

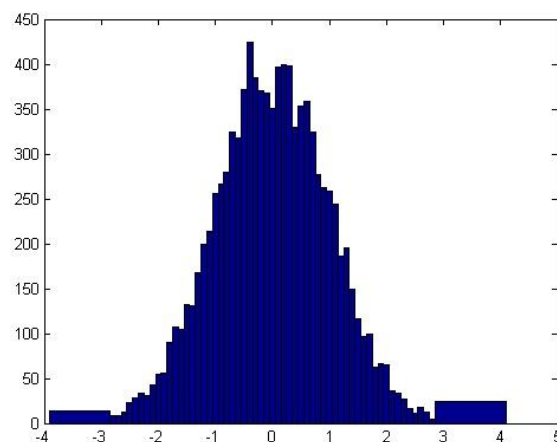


Fig2. Histogram Equalization

image, such that the output image contained a uniform distribution of intensities, and to increase the dynamic range of the histogram of an image. The following detailed procedure was then employed as the feature extraction procedure on all the images before proceeding to the feature ranking and feature selection schemes

(A) Wavelet Transform-Based Features

Wavelet transform to separate low and high frequency and its image is represented in terms of frequency .Decomposition method used by 2-D Discrete Wavelet Transform (DWT) and its find to extract low frequency.

$$\text{Average Dh1} = \frac{1}{p \times q} \sum_{x=\{p\}} \sum_{y=\{q\}} |\text{Dh1}(x, y)| \quad (1)$$

$$\text{AverageDv1} = \frac{1}{p \times q} \sum_{x=\{p\}} \sum_{y=\{q\}} |\text{Dv1}(x, y)| \quad (2)$$

$$\text{Energy} = \frac{1}{p^2 \times q^2} \sum_{x=\{p\}} \sum_{y=\{q\}} (\text{Dv1}(x, y))^2 \quad (3)$$

DWT is multiscale analysis method and its have two co-efficient

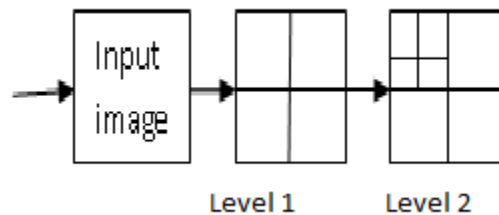


Fig3.Multiscale analysis method

- i) Detailed co-efficient
- ii) Approximation co-efficient.

In the orthogonal wavelet decomposition procedure, the generic step splits the approximation coefficients into two parts. After splitting we obtain a vector of approximation coefficients and a vector of detail coefficients, both at a coarser scale. The information lost between two successive approximations is captured in the detail coefficients. Then the next step consists of splitting the new approximation coefficient vector, successive details are never reanalyzed.

In the corresponding wavelet packet situation, each detail coefficient vector is also decomposed into two parts using the same approach as in approximation vector splitting. This offers the richest analysis. The complete binary tree is produced in the one-dimensional case or a quaternary tree in the two-dimensional case.

A) Preprocessing of Features

Preprocessing step is done to enhance the fundus image. Color image processed to grey value (ie) RGB to grey level. The image is preprocessed to remove the noise and improve the accuracy.

The digital colour retinal images required for the development of automatic system for maculopathy detection are provided by the Department of ophthalmology and following different preprocessing techniques

- i) Color enhancement
- ii) Color normalization
- iii) Fundus mask detection

Color normalization is necessary due to the significant inter and intra image variability in the colour of the retina in different patients. There can also be, differences in skin pigmentation, aging of the patient and iris colour between different patients that affect the colour of the retinal image. Colour normalization method is applied to make the images invariant with respect to the background pigmentation variation between individuals. The colour normalization is performed using histogram matching (Gonzalez and Woods 2004).



The color enhancement techniques are aimed at altering the visual appearance that makes an object distinguishable from other objects and the background. Usually retinal images acquired using standard clinical protocols often exhibit low contrast and may contain photographic artifacts. Also, it can be seen that retinal image contrast is decreased as the distance of a pixel from the centre of the image increases. In the current work this preprocessing step is applied to retinal images after the colour normalization.

The mask is a binary image with the same resolution as that of fundus image whose positive pixels correspond to the foreground area. It is important to separate the fundus from its background so that the further processing is only performed for the fundus and not interfered by pixels belonging to the background. In a fundus mask, pixels belonging to the fundus are marked with ones and the background of the fundus with zeros.

IV. WAVELET SEGMENTATION SYSTEM

The steps involved in wavelet segmentation and

The main objective of segmentation is to group the image into regions with same property or characteristics. It plays a major role in image analysis system by facilitating the description of anatomical structures and other regions of interest. shown in Fig. 4. Here, texture mosaic images of size $N \times N$ are considered. The analysis is carried out by considering sub-images (i.e., block) of size 32×32 . Each 32×32 sub-image, taken from top left corner of the original image, is decomposed using one level DWT and co-occurrence matrices (C) are derived for sub-image and detail sub-bands (i.e., LH1, HL1 & HH1 sub-bands) of wavelet decomposed sub-image. In our implementation, the contrast feature values, calculated over all the blocks, are subjected to linear normalization in the scale of 0–255, while the cluster shade and cluster prominence features, which found to have very large dynamic ranges, are subjected to logarithmic normalization in the scale of 0–255 for computational simplicity, without affecting their original variations. A necessary initial step in applying shape analysis to retinal blood vessels is to segment the blood vessels from the background. A supervised approach for vessel segmentation based on the continuous wavelet transform (DWT) in which has been shown to outperform other state-of-the-art methods with respect to receiver-operating-characteristic (ROC) analysis on public retinal image databases.

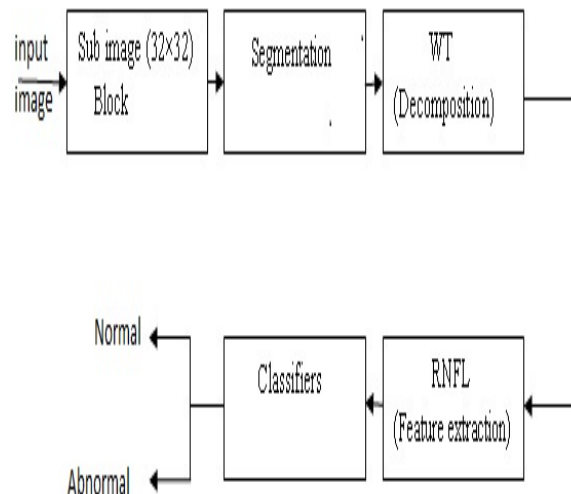


Fig4. Wavelet segmentation system

V. FEATURE EXTRACTION AND CLASSIFIERS

To extracted from RNFL images produced by very high accuracy and removed by the blurred image. The images are segmented and the features are extracted and features were proposed, based partly on observation of the characteristics human observers use to recognize abnormal vessels, such as their shape, position, orientation, brightness, contrast and line density.

Two classifiers are


- i) Support Vector Machine
- ii) Artificial Neural Network

Using classification technique—classify image as normal or abnormal. Some of the classification techniques are Super Vector Machine(SVM) and Artificial Neural Network(ANN). A Support Vector Machine (SVM) performs classification by constructing an N-dimensional hyperplane that optimally separates the data into two categories. SVM models are closely related to neural networks. In fact, a SVM model using a sigmoid kernel function is equivalent to a two-layer, perceptron neural network. The neural network used for rotor fault diagnosis consists of one hidden layer and one output layer.

VI. EXPERIMENTAL RESULTS AND DISCUSSION


The segmentation technique discussed in the previous section is applied on five different wavelet filter co-efficients with features namely (diagonal horizontal dh1, diagonal vertical dv1 and energy) and in this techniques, new approaches of extracting features from the clinical scans have been proposed and used for classification. Its follows table no (1) and (2) different wavelet filter coefficients and features and plot the graphs between features and images. The classifier predicts the membership of each sample in the data set based on its feature vector and its classified into two images normal and abnormal.

This work can be implemented for finding the stages of glaucoma. More statistical features may be incorporate for the improvement of accuracy of the system. It is also adopted for the other diseases. The performance was analyzed using normal and abnormal images curve. In this curve the comparison is between the images and features. The area under this curve was detecting images with new vessels on the disc. The performance of this system is better than the existing system

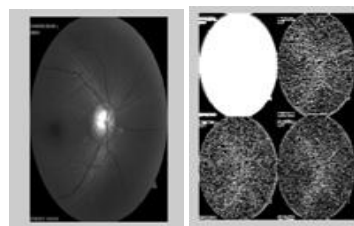


(a)

(b)

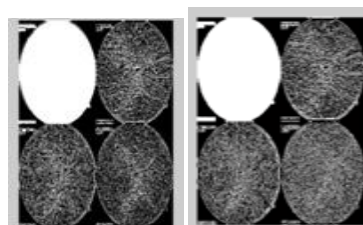

(c)

(d)

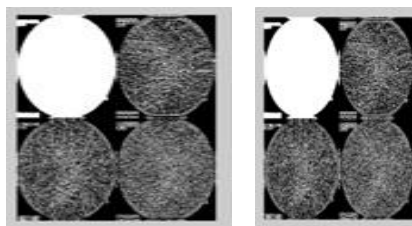

(e)

(f)

Fig 5. Typical fundus images (a) normal input image (b) Db3 wavelet filter (c) Sym3 wavelet filter (d) Rbio3.3 wavelet filter (e) Rbio3.5 wavelet filter (f) Rbio3.7 wavelet filter

VII. CONCLUSION

This study illustrates the dependence between features extracted from RNFL that have been subjected to various feature ranking and feature selection methods. The ranked subsets of selected features have been fed to a set of classification algorithms to gauge the effectiveness of these features. From the accuracies obtained and contrasted, we can conclude that the energy obtained from the detailed coefficients can be used to distinguish between normal and glaucomatous images with very high accuracy. As observed the db3-h1_Average_l1_Norm and the rbio3.3-cD_Energy features are highly discriminatory. Furthermore, from Table I and II that both LibSVM_(1) and SMO_(2).

REFERENCES

1. S.Dua et al., "Wavelet-based energy features for glaucomatous image classification," IEEE Trans. Inf. Technol. Biomed., vol. 15, no. 3, pp. 449–455, May 2011.
2. U. R. Acharya et al., "Automated diagnosis of glaucoma using texture and higher order spectra features," IEEE Trans. Inf. Technol. Biomed., vol. 16, no. 1, pp. 1459–1475, January 2012.
3. K. Huang and et al., "Wavelet feature selection for image classification," IEEE Trans. Image Process., vol. 17, no. 9, pp. 1709–1720, Sep.2008.
4. K. R. Sung et al., "Imaging of the retinal nerve fiber layer with spectral domain optical coherence tomography for glaucoma diagnosis," Br.J.Ophthalmol., vol. 51, pp. 264–271, 2010.
5. B. Brown et al., "Structural and functional imaging of the retina: New ways to diagnose and assess retinal disease," Clin. Exp.Optomtry, vol. 91, pp. 504–514, 2008.
6. Yoshinori Hayashi et al., "Detection of Retinal Nerve Fiber Layer Defects in Retinal Fundus Images using Gabor Filtering" Med.Ima., vol.6514, 2007.
7. H. Liu and R. Setiono, "Chi2: Feature selection and discretization of numeric attributes," in Proc. IEEE 7th Int. Conf. Tools With Artif. Intell., 1995, pp. 338–391.
8. Arivazhagan and L. Ganesan, "Texture classification using wavelet transform," Pattern Recog. Lett., vol. 24, pp. 1513–1521, 2003.
9. C.Nagarajan and M.Madheswaran - 'Stability Analysis of Series Parallel Resonant Converter with Fuzzy Logic Controller Using State Space Techniques'- Taylor & Francis, Electric Power Components and Systems, Vol.39 (8), pp.780-793, May 2011. DOI: 10.1080/15325008.2010.541746
10. C.Nagarajan and M.Madheswaran - 'Experimental verification and stability state space analysis of CLL-T Series Parallel Resonant Converter' - Journal of Electrical Engineering, Vol.63 (6), pp.365-372, Dec.2012. DOI: 10.2478/v10187-012-0054-2
11. C.Nagarajan and M.Madheswaran - 'Performance Analysis of LCL-T Resonant Converter with Fuzzy/PID Using State Space Analysis'- Springer, Electrical Engineering, Vol.93 (3), pp.167-178, September 2011. DOI 10.1007/s00202-011-0203-9
12. S.Tamilselvi, R.Prakash, C.Nagarajan, "Solar System Integrated Smart Grid Utilizing Hybrid Coot-Genetic Algorithm Optimized ANN Controller" Iranian Journal Of Science And Technology-Transactions Of Electrical Engineering, DOI10.1007/s40998-025-00917-z, 2025
13. S.Tamilselvi, R.Prakash, C.Nagarajan, "Adaptive sliding mode control of multilevel grid-connected inverters using reinforcement learning for enhanced LVRT performance" Electric Power Systems Research 253 (2026) 112428, doi.org/10.1016/j.epr.2025.112428



14. S.Thirunavukkarasu, C. Nagarajan, 2024, "Performance Investigation on OCF and SCF study in BLDC machine using FTANN Controller," Journal of Electrical Engineering And Technology, Volume 20, pages 2675–2688, (2025), doi.org/10.1007/s42835-024-02126-w
15. Nagarajan, M.Madheswaran and D.Ramasubramanian- 'Development of DSP based Robust Control Method for General Resonant Converter Topologies using Transfer Function Model'- Acta Electrotechnica et Informatica Journal , Vol.13 (2), pp.18-31, April-June.2013, DOI: 10.2478/aei-2013-0025.
16. C.Nagarajan and M.Madheswaran - 'DSP Based Fuzzy Controller for Series Parallel Resonant converter'- Springer, Frontiers of Electrical and Electronic Engineering, Vol. 7(4), pp. 438-446, Dec.12. DOI 10.1007/s11460-012-0212-0.
17. C.Nagarajan and M.Madheswaran - 'Experimental Study and steady state stability analysis of CLL-T Series Parallel Resonant Converter with Fuzzy controller using State Space Analysis'- Iranian Journal of Electrical & Electronic Engineering, Vol.8 (3), pp.259-267, September 2012.
18. C.Nagarajan and M.Madheswaran, "Analysis and Simulation of LCL Series Resonant Full Bridge Converter Using PWM Technique with Load Independent Operation" has been presented in ICTES'08, a IEEE / IET International Conference organized by M.G.R.University, Chennai.Vol.no.1, pp.190-195, Dec.2007
19. Suganthi Mullainathan, Ramesh Natarajan, "An SPSS and CNN modelling based quality assessment using ceramic materials and membrane filtration techniques", Revista Materia (Rio J.) Vol. 30, 2025, DOI: <https://doi.org/10.1590/1517-7076-RMAT-2024-0721>
20. M Suganthi, N Ramesh, "Treatment of water using natural zeolite as membrane filter", Journal of Environmental Protection and Ecology, Volume 23, Issue 2, pp: 520-530,2022
21. J. M. Miquel-Jimenez et al., "Glaucoma detection by wavelet-based analysis of the global flash multifocal electroretinogram," Med. Eng. Phys., vol. 32, pp. 617–622, 2010.
22. M. Balasubramanian et al., "Clinical evaluation of the proper orthogonal decomposition framework for detecting glaucomatous changes in human subjects," Invest. Ophthalmol. Vis. Sci., vol. 51, pp. 264–271, 2010.
23. Daubechies, Ten Lectures on Wavelets. Philadelphia, PA: Society for Industrial and Applied Mathematics, 1992. R. C. Gonzalez and R. E. Woods, Digital Image Processing. NJ: Prentice Hall, 2001.
24. M. H. Dunham, Data Mining Introductory and Advance Topics. NJ: Prentice Hall, 2002.
25. J. R. Quinlan, "Induction of desion trees," Mach. Learning, vol. 1, pp. 81–106, 1986.
26. J. R. Quinlan, C4.5 Programs for Machine Learning. San Mateo:Morgan Kaufmann, 1993.
27. I. Daubechies, Ten Lectures on Wavelets. Philadelphia, PA: Society for Industrial and Applied Mathematics, 1992.
28. K. Kira and L. A. Rendell, "A practical approach to feature selection," in Proc. 9th
29. Int. Workshop Mach. Learning, San Francisco, CA, pp. 249–256, 1992.
30. M. Hall et al., "The WEKA data mining software: An update," SIGKDD Explorations, vol. 11, pp. 10–18, 2009.
31. Kiran, A., Rubini, P., & Kumar, S. S. (2025). Comprehensive review of privacy, utility and fairness offered by synthetic data. *IEEE Access*.
32. Gopinathan, V. R. (2024). Real-Time Financial Risk Intelligence Using Secure-by-Design AI in SAP-Enabled Cloud Digital Banking. *International Journal of Computer Technology and Electronics Communication*, 7(6), 9837-9845.
33. Udayakumar, R., Elankavi, R., Vimal, R., & Sugumar, R. (2023). Improved Particle Swarm Optimization with Deep Learning-Based Municipal Solid Waste Management in Smart Cities. *Environmental & Social Management Journal*, 17(4).
34. Anand, L. (2023). An Intelligent AI and ML–Driven Cloud Security Framework for Financial Workflows and Wastewater Analytics. *International Journal of Humanities and Information Technology*, 5(02), 87-94.
35. Soundappan, S. J. (2020). Big Data Analytics in Healthcare: Applications for Pandemic Forecasting. *International Journal of Advanced Research in Computer Science & Technology*, 3(1), 2248-2253.
36. Rajasekar, M. (2024). Real-Time Predictive DevOps Intelligence for Risk-Aware Digital Business Processes in Cloud and SAP Ecosystems. *International Journal of Advanced Research in Computer Science & Technology*, 7(4), 10713-10718.
37. Poornima, G., & Anand, L. (2024, May). Novel AI Multimodal Approach for Combating Against Pulmonary Carcinoma. In 2024 5th International Conference for Emerging Technology (INCET) (pp. 1-6). IEEE.
38. Prabha, P. S., & Rengarajan, A. (2025). Adaptive Cloud Resource Allocation Using Attention-Driven Deep Reinforcement Learning. *Engineering, Technology & Applied Science Research*, 15(6), 29334-29340.
39. Jagadeesh, S., & Sugumar, R. (2017). A Comparative study on Artificial Bee Colony with modified ABC algorithm. *European Journal of Applied Sciences*, 9(5), 243-248.



40. Varma, K. K., & Anand, L. (2025, March). Deep Learning Driven Proactive Auto Scaler for High-Quality Cloud Services. In *International Conference on Computing and Communication Systems for Industrial Applications* (pp. 329-338). Singapore: Springer Nature Singapore.
41. Kumar, S. A., & Anand, L. (2025). A Novel EEG-Based Deep Learning Framework for Enhancing Communication in Locked-In Syndrome Using P300 Speller and Attention Mechanisms. *KSII TRANSACTIONS ON INTERNET AND INFORMATION SYSTEMS*, 19(11), 3841-3855.
42. Poornima, G., & Anand, L. (2025). Medical image fusion model using CT and MRI images based on dual scale weighted fusion based residual attention network with encoder-decoder architecture. *Biomedical Signal Processing and Control*, 108, 107932.
43. Archana, R., & Anand, L. (2025). Residual u-net with Self-Attention based deep convolutional adaptive capsule network for liver cancer segmentation and classification. *Biomedical Signal Processing and Control*, 105, 107665.
44. Rengarajan, A. (2025). Cloud-Based AI-Driven Threat Detection Framework for Smart Grid Cybersecurity. *International Journal of Future Innovative Science and Technology*, 8(6), 16065.
45. Murugeswari, B., Sudharson, K., Panimalar, S. P., Shanmugapriya, M., & Abinaya, M. (2020). SAFE–Secure Authentication in Federated Environment using CEG Key code.
46. Raj A. A., & Sugumar, R. (2023). Early Detection of COVID-19 with Impact on Cardiovascular Complications using CNN Utilising Pre-Processed Chest X-Ray Images. *2023 International Conference on Applied Intelligence and Sustainable Computing (ICAISC), IEEE*.
47. Jagadeesh, S., & Sugumar, R. (2017). A Comparative study on Artificial Bee Colony with modified ABC algorithm. *European Journal of Applied Sciences*, 9(5), 243-248.
48. Selvi, G. V., Anbarasan, A. B., Murthy, B. A., & Prabavathy, S. (2023). An Application Oriented Integrated Unequal Clustering Algorithm for Wireless Sensor Network. In *Underwater Vehicle Control and Communication Systems Based on Machine Learning Techniques* (pp. 140-154). CRC Press.
49. Sruthi, R. S., Ananya, S., & Murugeswari, B. (2010). Web Based Virtual Control System Laboratory and On-Line Temperature Control of Electrophoresis Equipment using LabVIEW. *International Journal of Computer Applications*, 975, 8887.
50. Vimal Raja, G. (2021). Mining Customer Sentiments from Financial Feedback and Reviews using Data Mining Algorithms. *International Journal of Innovative Research in Computer and Communication Engineering*, 9(12), 14705-14710.
51. MATHEW, A. R. (2025). Neurosecurity and Brain-Computer Interfaces.
52. Soundappan, S. J. (2024). AI-Driven Customer Intelligence in Enterprise Lakehouse Systems Sentiment Mining Governance-Aware Analytics and Real-Time Data Synchronization. *International Journal of Advanced Engineering Science and Information Technology (IJAESIT)*, 7(5), 14905.
53. Mathew, A. (2025). Human–AI Collaboration in Security Operations: Measuring Alert Trust, Automation Bias, and Analyst Upskilling in AI-Augmented SOC Environments. *International Journal of Computer Technology and Electronics Communication*, 8(5), 11375-11380.
54. Soundappan, S. J. (2022). AI-Based Fault Detection and Isolation for Reliability in Modern Power Systems. *International Journal of Research Publications in Engineering, Technology and Management (IRPETM)*, 5(4), 7106-7110.
55. Poornima, G., & Anand, L. (2024, April). Effective Machine Learning Methods for the Detection of Pulmonary Carcinoma. In *2024 Ninth International Conference on Science Technology Engineering and Mathematics (ICONSTEM)* (pp. 1-7). IEEE.
56. Garg, V. K., Soundappan, S. J., & Kaur, E. M. (2020). Enhancement in intrusion detection system for WLAN using genetic algorithms. *South Asian Research Journal of Engineering and Technology*, 2(6), 62–64.
57. Rengarajan, A., Jayakumar, C., & Sugumar, R. (2012). Optimization Of Recent Attacks Using Internet Protocol. *National Journal of System and Information Technology*, 5(1), 8.
58. Mathew, A. (2024). AI TRiSM: Trust, Risk, and Security Management in Cybersecurity. *Cybersecurity*, 4(3), 84-90.
59. Mathew, A. (2025). Deep seek vs. ChatGPT: A deep dive into AI Language mastery. *Int J Multidisciplinary Res*, 7(1), 1-5.